

3250 Fixed Frame Window



STANDARD FEATURES

- Architectural Grade Performance - AW-80 (60 X 99)
- Thermally broken 3-1/4" frame with integral nail fin
- 1 inch Insulated Glass, IGCC-CBA rated, tested, and approved
- Aluminum glazing beads to match window finish


OPTIONS

- Equal leg frame or integral front flange frame
- Impact Wind Zone 4, Level D - ASTM E 1886/1996, DP +75/-85 (48 X 96)
- Integral frame HVAC louver system
- Mullion and stacking options
- Receptor, subsill and panning closure systems
- 3/4 inch insulated glass

ACCESSORIES

- 3 1/4" Vertical Mullions, Integral Louver Frame, Interior Trim & Clip,
- Panning Trim, Stool Covers, Subsill Extenders

3250 Fixed Frame Window

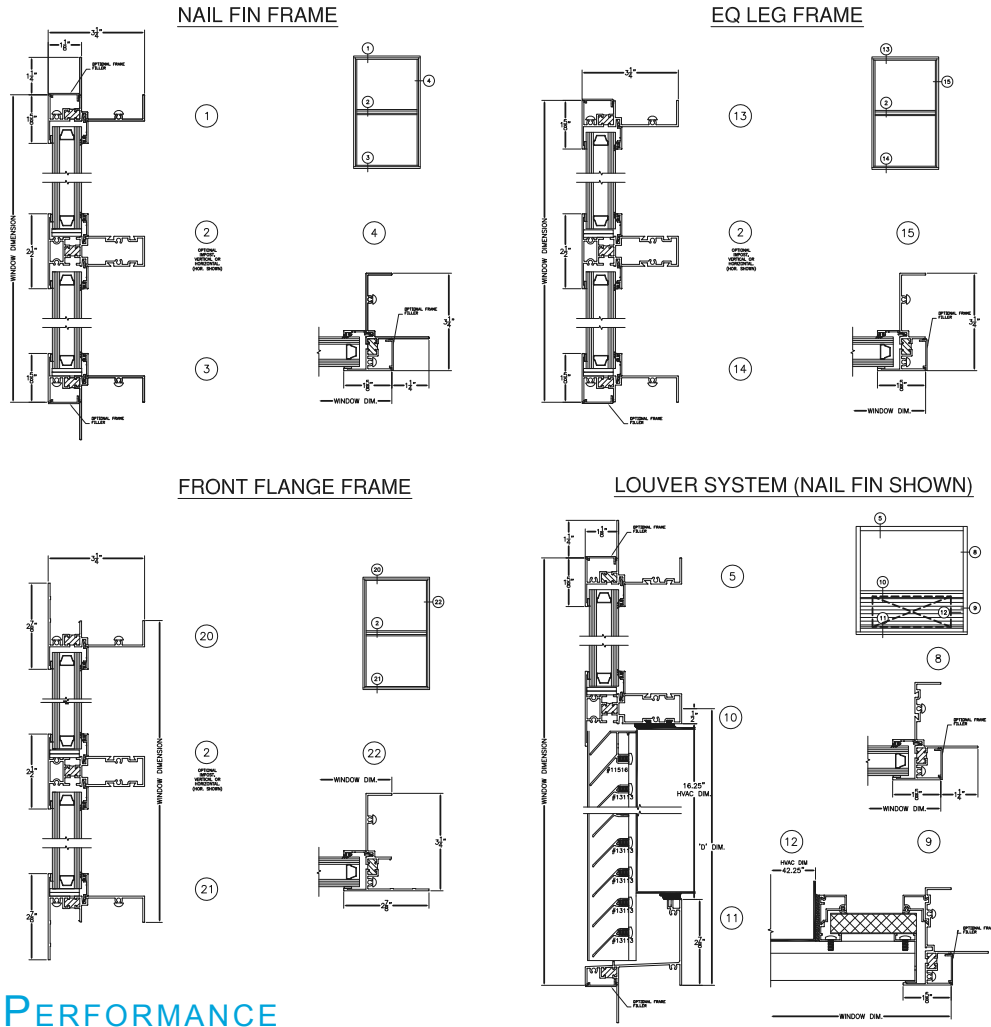

PERFORMANCE

AAMA/WDMA/CSA 101/I.S.2/A440-08

AW-PG80-FW – 60” X 99”

Large Missile Impact: Wind Zone 4: ASTM E 1886/1996

DP 75/-85 PSF – 48” X 96”

Air Infiltration: <.10 CFM/SQ.FT.@ 6.24 PSF per ASTM E293

Water Resistance: 12 PSF per ASTM E 547 & 331

Uniform Deflection:

AW80 - 80 PSF per ASTM E330

Uniform Structural:

AW80 - 120 PSF per ASTM E330

Thermal Performance: 1” Insulated Glass (NFRC 100/200)

Low-E U-factor = 0.40

Low-E & argon U-factor = 0.37

Thermal Performance: 1” Insulated Glass per AAMA 1503

Low-E U-factor = 0.41; CRF = 50

